


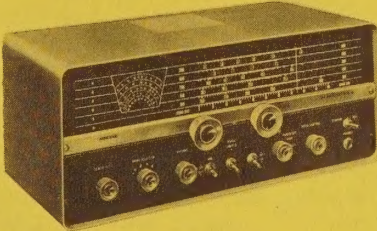
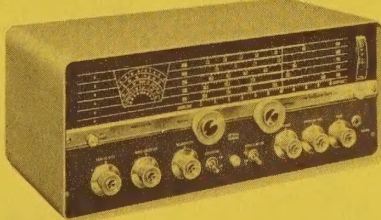
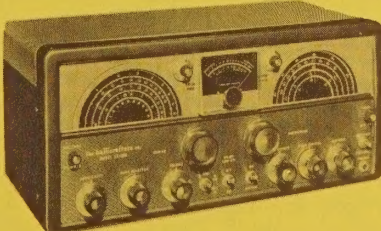
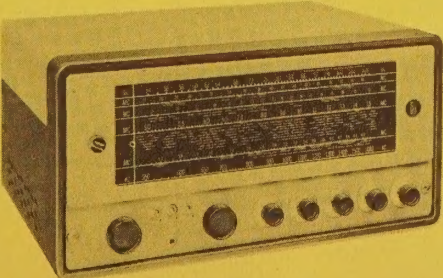
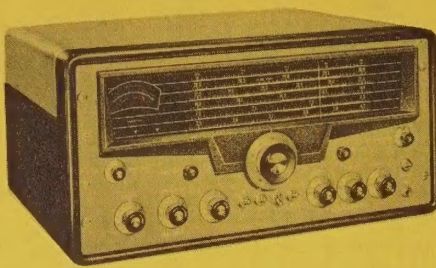
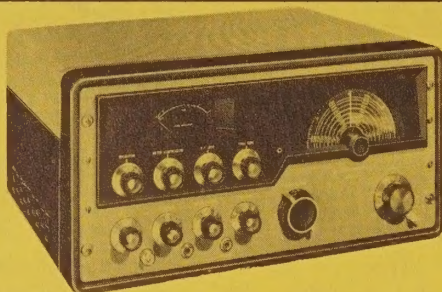



hallicrafters

Precision Built!

COMMUNICATIONS EQUIPMENT

Model		Description	Price
S-38E S-38EM S-38EB		Broadcast 540-1650 kc, three S/W bands 1650 kc-32 Mc. Large easy-to-read overseas dial, separate electrical band-spread dial with 0-100 scale. Phone tip jacks. Four tubes plus one rectifier — 105/125V. 50/60 cycle AC/DC. Line cord (87D1566) for 220V. — \$2.00 AC/DC operation. Gray steel cabinet with silver trim. Also available in blond or mahogany with gold trim. 12 7/8" x 7" x 9 1/4". Shipping wt. 14 lbs. (U/L approved.)	\$59.95
S-94 or S-95		S-94: 30-50 Mc and S-95: 152-173 Mc. Super sensitive, increased audio power output, adj. built-in relay squelch system. Low noise R.F. amplifier, separate high gain d.c. amp. for squelch system. Ideal for Civilian Defense. Phone tip jacks. Eight tubes plus one rectifier — 105/125V. 50/60 cycle AC/DC mobile operation possible with external power converter. Gray steel cabinet, silver and red trim. 12 7/8" x 7" x 7 1/4". Shipping wt. 12 1/2 lbs.	\$64.95
S-107		Broadcast 540-1630 kc and four S/W bands over 2.5-31 and 48-54.5 Mc. Overseas dial, jacks for headphones plus phono jack. Separate electrical bandspread with 0-100 logging scale plus Mc calibration for 48-54.5. Seven tubes plus rectifier — 105/125V. 50/60 cycle AC. Gray steel cabinet, silver trim, 6 3/4" x 13 1/4" x 8 1/4". Shipping wt. 19 lbs. (U/L approved.)	\$94.95
S-108		Broadcast 540-1680 kc, three S/W bands 1680 kc-34 Mc. Slide rule dial bandspread calibrated on 10, 15, 20, 40 and 80 meter amateur bands. Temp. compensated oscillator. Headphone jack. Seven tubes plus rectifier. 105/125V. 50/60 cycle. Gray steel cabinet, silver trim. 8 1/2" x 18 1/2" x 11". Shipping wt. 35 lbs. (U/L approved.)	\$129.95
SX-110 (Less speaker)		Broadcast 540-1680 kc, three S/W bands 1680 kc-34 Mc. Slide rule dial bandspread calibrated on 10, 15, 20, 40 and 80 meter amateur bands. Antenna trimmer, "S" meter. Crystal filter. Seven tubes plus one rectifier — 105/125V. 50/60 cycles AC. Gray steel cabinet, silver trim. Use R-48 speaker. 8 1/2" x 18 1/2" x 11". Shipping wt. 35 lbs. (U/L approved.)	\$159.95
SX-100 (Less speaker)		Broadcast 538-1580 kc, three S/W 1720 kc-34 Mc. Double conversion superheterodyne over the entire frequency range. Precision gear drives, selectable side band reception of both suppressed and full carrier, delayed AVC, CW operation with AVC on or off. Calibrated bandspread, "S" meter, phones jack on front panel. Twelve tubes plus one rectifier and one voltage regulator — 105/125V. 50/60 cycle AC. Gray and black steel cabinet, silver and red trim, piano hinge top — Tee-Notch Filter to reduce heterodynes. Built-in 100 kc crystal calibrator. Antenna trimmer. Logging dials on tuning knobs. 18 3/8" x 8 1/2" x 10 5/8". Shipping wt. 43 lbs. approx. (U/L approved. Certified for FCDA matching funds. OCDM Item #R-16.)	\$295.00
SX-62A (Less speaker)		Broadcast 550-1620 kc. three S/W bands 1.62-32 Mc, FM 27-109 Mc. Wide vision dial, one band lights at a time, temperature compensated, voltage regulated, six-position selectivity, phone jack. Fourteen tubes plus one rectifier and one voltage regulator — 105/125V. 50/60 cycle AC. Satin black steel cabinet, gray and silver trim — 20" x 10 1/2" x 16". Shipping wt. 66 lbs. approx. Use R-48 speaker. (U/L approved.)	\$375.00

Model		Description	Price
SX-101A (Less speaker)		Model SX-101A has 13 tubes plus voltage regulator and rectifier. Powerline fuse. Complete coverage of six ham bands — 80, 40, 20, 15, 10 meters, plus a calibrated band for use with 2 and 6 meter converters. Large slide rule dial. S-meter functions with AVC off. Fast/slow switch for AVC. Special 10 Mc position for WWV. Dual conversion. Exclusive Hallicrafters upper-lower side band selection. Tee-notch filter. Product detector. Full gear drive, built-in precision 100 kc evacuated marker crystal. Sensitivity — one microvolt or less on all bands. Antenna trimmer. Use R-47 speaker. Size 20" wide, 10½" high and 16" deep — weight approximately 74 lbs. (Certified for FCDA matching funds. OCDM Item #R-16.)	\$3●50
HT-32A		Model HT-32A has S.S.B. AM or CW output on 80, 40, 20, 15, and 10 meter bands. It offers two exclusive features in S.S.B. generation techniques. (1) 5.0 mc. quartz crystal filter cuts unwanted sideband 50 db. or more. (2) Bridged-tee modulator makes the HT-32A extremely stable. 144 watts plate input (P.E.P. two-tone). down 30 db. or more. Precision gear driven C.T.O. Ideal CW keying. Size 20" wide x 10½" high x 16" deep. Weight approximately 85 lbs. (Certified for FCDA matching funds. OCDM Item #T-32, T-32SSB and T-32CW.)	\$695.00
HT-33A		HT-33A . . Linear amplifier . . Conservatively rated at maximum legal power input. Third and fifth order distortion products down in excess of 30 db. All important circuits metered. R.F. output meter for simplified tune-up. Pi-network with variable output loading. Circuit breaker power supply protection. PL-172 tube rated at full kilowatt plate dissipation. Size 20" x 10½" x 16". Shipping weight approximately 130 lbs. (Certified for FCDA matching funds. OCDM Item #T-32, T-32SSB and T-32CW.)	\$795.00
SR-34		Model SR-34 Two & Six Meter receiver/transmitter is a complete fixed, portable or mobile radio station. It provides AM or CW reception and transmission over the frequency ranges of 49 to 54 and 143.5 to 148.2 mc. Transmitter is crystal controlled and requires one to four crystals in the 8 mc range or external V.F.O. Unit has 6 to 10 watts output. Negative peak clipping. Dual Conversion one microvolt receiver has S meter, B.F.O. ANL squelch and sensitivity control. Deluxe model includes cover and whip antenna and built-in 6 or 12 volt transistor power supply. Standard model same features but only 105-125 volts 50/60 c.p.s. power supply and no cover or antenna. (Certified for FCDA matching funds. OCDM Item #U-68 and U-70.)	\$4●00 (Complete) \$395.00 (Standard Model)
CB-1		Hallicrafters CB-1 Citizens Band Transceiver offers two-way radio communications over distances up to five miles. No examination necessary. FCC license application form packed with each unit. Five watts input, magic eye indicator permits 100% modulation, adjustable squelch, microphone gain control, microphone included. Excellent selectivity and sensitivity. Meets all FCC requirements. 117V. AC. 6¾"x13¼"x8¼". Shipping weight less antenna 18 lbs.	\$129.95 (Less antenna) \$139.95 (Complete)
R-48		Matching 5½"x7½" speaker for any Hallicrafters or other receiver having a 3.2 ohm output. 3.16 oz. magnet produces a fully saturated air gap and distortion-free reproduction. A fidelity switch permits selection of full fidelity response or voice frequency for communications reception. For use with SX-100, SX-101A, SX-110 and SX-62A. Gray steel cabinet. 6¾"x13¼"x8¼". Shipping weight 9 lbs.	\$19.95
R-47		Matching 4" Speaker for Hallicrafters SX-110, SX-100 and SX-101A. Essentially flat frequency response over a range of 300 to 2850 C.P.S. with a very rapid drop in output above and below the cutoff points. The unit is designed for speech and c.w. reproduction only and is extremely effective on S.S.B. Input impedance 3.2 ohms. Size 5½"x5¼"x3½". Shipping weight approximately 2½ lbs.	\$12.95